



S.G. INTERNATIONAL GROUP H.K. LIMITED

SHENZHEN SHUGUANG DIGITAL TECHNOLOGY CO., LTD.

Add: Gold industrial park, NanLing village, Buji Town, Shenzhen, China

Tel: (86)0755-25387626

84701880

84701680

Fax : (86)0755-84701680

[Http://www.sgcg-group.com](http://www.sgcg-group.com)

E-mail: sgled@vip.163.com

MSN: sgled@hotmail.com

Yahoo Messenger: sgled_usa@yahoo.com

➤ Skype Trunk Server ST40

4*mobile trunk (GSM or CDMA)+ 4*FXO+4*FXS+1*USB



Feature

Use Skype service combines with your existing PABX/PBX system that is already in place.

Use the PABX/PBX extension, so you can dial Skype out and receive Skype in.

Skype to PBX or PBX to Skype is free service.

Corporate users may have multiple Skype connections meaning you can have more users online.

One Company with One dial in number, Skypbx automatically switches from a busy line to a free line. Works like a traditional PBX,centrall office lines.

Provides you the user with a Skype telephone book which can store numbers with up to 12 digits, allowing for the Skype global user.

Your staff may use the PBX system to dial out using Skype for free.

You can manage Skype accounts into One System.

Through the specified user account exchange system, Skype's telephonic functions have been upgraded.

For Example;

i. Automatic answering service (IVR).

ii. Recording and monitoring of calls taken place.

iii. Conference talk iv. Transfer call.

The Skypbx system provides you with a fully functional network management system.

(1) Displayed connections status

(2) Record all communications

(3) Recording of all incidents

(4) Connection history reports

Skypbx can appoint an user to manage the entire system. As to prevent any network intrusion and avoid any possibility of security concerns.

One PC can run 4 Skype accounts meaning that at any time on one PC you have 4 lines available.

Specifications

Communication agreement: Complies with Skype.

Firewall/NAT agreement: Complies with Skype.

USB port: 2.0 USB port to PC.

LED indicator: Every line from the Skypbx has its own LED display.

Voltage: ITU Standard of 48 volts.

Dialing tone: Standard busy, ringing and dialing tones.

DTMF: Auto detection and Auto generate.

Managemetn tools: Console setup of management software.

Input: DC12V, 2A.

Case Size: 1U 228(D)*437.6(W)*44(H)mm



S.G. INTERNATIONAL GROUP H.K. LIMITED

SHENZHEN SHUGUANG DIGITAL TECHNOLOGY CO., LTD.

Add: Gold industrial park, NanLing village, Buji Town, Shenzhen, China

Tel: (86)0755-25387626

84701880

84701680

Fax : (86)0755-84701680

[Http://www.sgcg-group.com](http://www.sgcg-group.com)


E-mail: sgled@vip.163.com

MSN: sgled@hotmail.com

Yahoo Messenger: sgled_usa@yahoo.com

➤ Skype Trunk Server ST40

Application

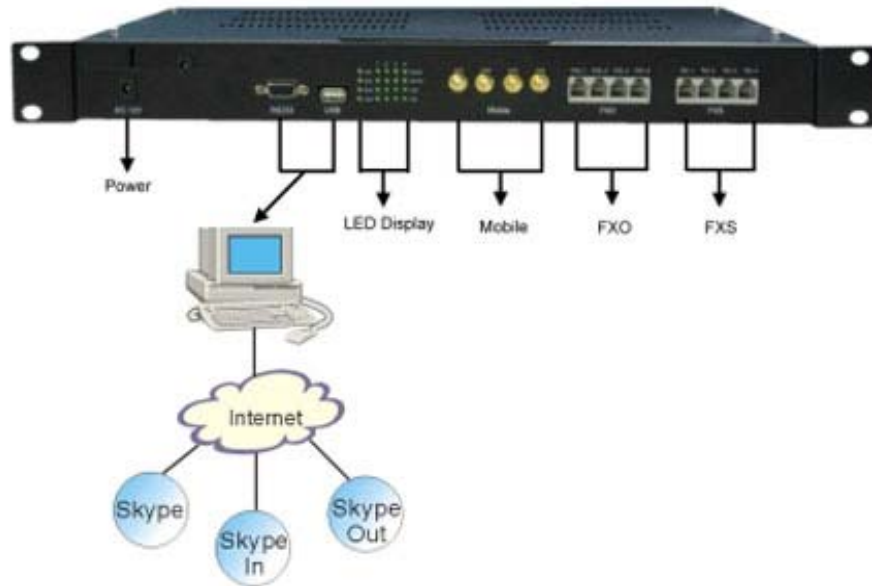

S.G. INTERNATIONAL

H.K. LTD.